
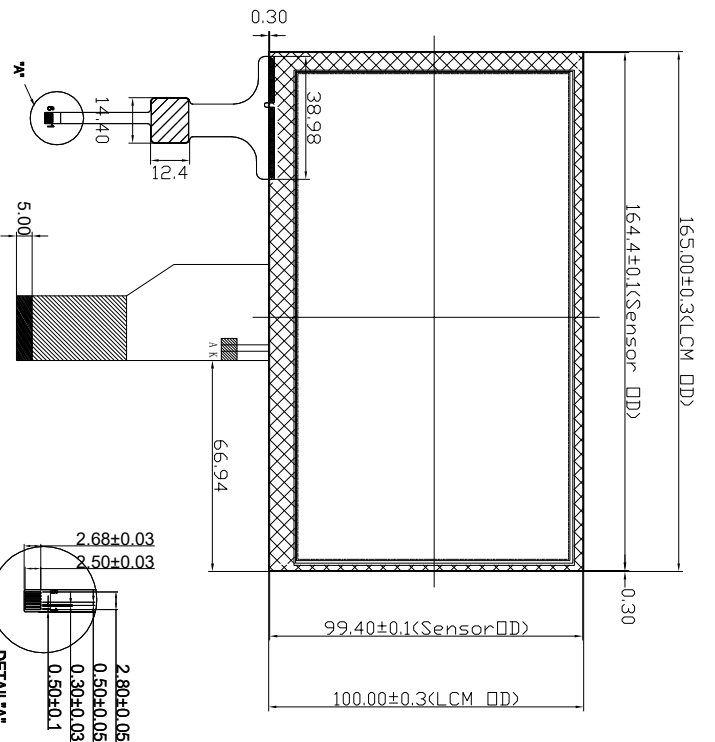
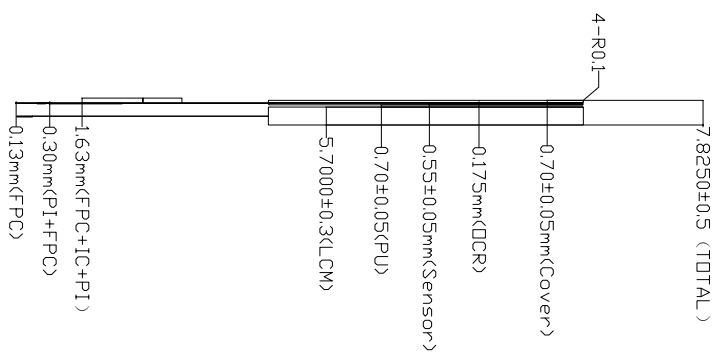


No ROHS hazardous material

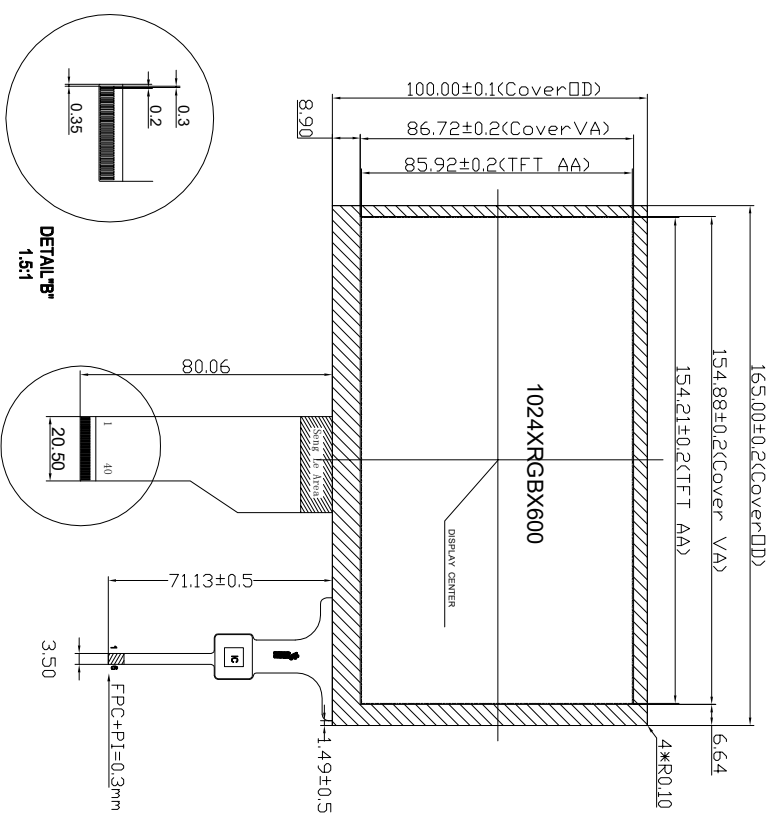

Screen printing area: Print Black

Frame adhesive foam area = 0.7mm

Front view

Side view

Back view

TP	PIN:
1	INT 3.3V
2	VDD 3.3V
3	SCL 3.3V
4	SDA 3.3V
5	RST 3.3V
6	GND

Technical parameters

1. Interfaces:	12C	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC solutions:	CYTA568	9. Surface hardness:	≥6H
4. Impact resistance:	30.00mm, Steelball 125g/1000次/50mm/100mm	10. Operate :	-20°C~+70°C, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30°C~+80°C, ≤85%RH
6. Power supply:	3.3V	12. Unmarked dimension tolerance	as±0.2

LCMHX070B12-40NF-30A PIN:

1	2	3	4	5	6	7	8	9	10	11	12	13	14
Vcom	VDD	VDD	NC	RESET/STBY	GND	Rstn-	Rstn+	GND	Rstn-	Rstn+	GND	Rstn-	Rstn+
15	16	17	18	19	20	21	22	23	24	25	26	27	28
Rstn+	GND	clk-	clk+	GND	Rstn3-	Rstn3+	GND	NC	NC	GND	NC	NC	SELB
29	30	31	32	33	34	35	36	37	38	39	40		
AVDD	GND	LED-	LED-	L/R	U/D	VGL	NC	NC	VGH	LED+	LED+		



杭州宏晷科技有限公司
Grahwolet Technology CO., Ltd

Model	HX0701703		view direction		Unit	MM	
Version	V1.0	Designer	LU0	Date	2017-5-12	Edition	A1
Customer		Approved	HBZ	Date	2017-5-12	Proportion	1:1